


## Signal Connectors- High density connectors (15EDG, 2EDG Series)



Israel Official Distributor  
Please contact: sales@data-jce.com  
www.data-jce.com

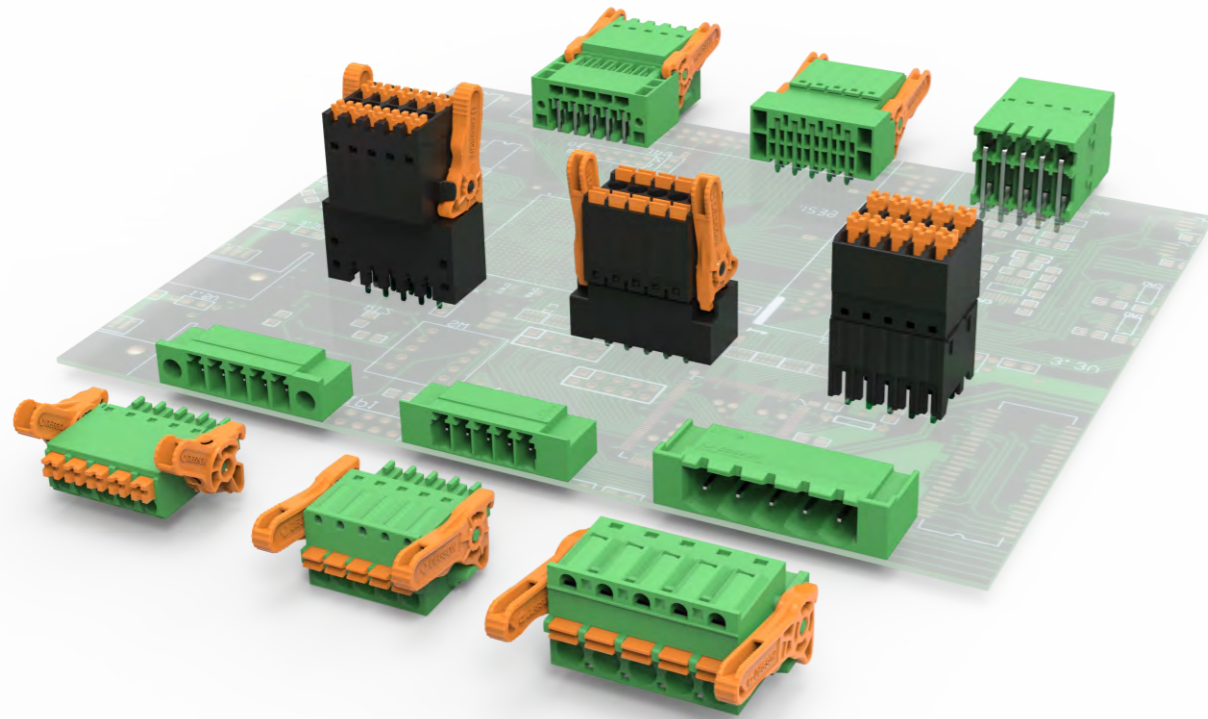

### Main features

- PUSH-IN spring connection technology for fast wiring, reducing the wiring time and costs
- High density structure from single to double layer, to meet the compact wiring for equipment miniaturization
- Rich product portfolio, varieties flange structures are used for different applications
- With function of mis plug-proof, preventing the mis-insertion between two or more products with the same poles

Picture	Product family	Notes	No. of pole	Pitch(mm)	Current(A)	Voltage(V)	Connection direction	Connection technology	Approvals
	15EDGKNNHC-3.5	High density PCB plug	04-48	3.5	8 IEC 8 UL (B,D)	160 IEC 300 UL(B,D)	/	Push-in spring connection	/
	15EDGRHB-THR-3.5	PCB header, THR soldering	04-48	3.5	8 IEC 8 UL (B,D)	160 IEC 300 UL(B,D)	0°	/	UL, VDE
	15EDGKNHG-3.5	High density PCB plug with lock-and-release locking system	04-48	3.5	9.5 IEC 8 UL (B)	250 IEC 300 UL(B)	/	Push-in spring connection	UL, VDE
	15EDGRHCM-THR-3.5	PCB header, THR soldering	04-48	3.5	9.5 IEC 8 UL (B,C)	250 IEC 150 UL (B) 50 UL (C)	0°	/	UL, VDE
	15EDGVHCM-THR-3.5	PCB header, THR soldering	04-48	3.5	9.5 IEC 8 UL (B,C)	250 IEC 300 UL (B) 50 UL (C)	90°	/	UL, VDE
	15EDGKNHBG-3.5	High density PCB plug with lock-and-release locking system	04-48	3.5	10 IEC UL(B,D)	160 IEC 300 UL(B,D)	/	Push-in spring connection	UL, VDE
	15EDGRHDM-3.5	PCB header	04-48	3.5	10 IEC UL (B)	125 IEC 1500 UL(B)	0°	/	UL, VDE
	15EDGVHDM-3.5	PCB header	04-48	3.5	10 IEC UL (B)	125 IEC 1500 UL(B)	90°	/	UL, VDE
	15EDGKNG-3.5	Compact PCB plug with latching flange	02-20	3.5	8 IEC 8 UL (B)	250 IEC 300 UL(B,D)	/	Push-in spring connection	UL, VDE
	15EDGRN-3.5	PCB header	02-20	3.5	8 IEC 8 UL (B,C)	250 IEC 300 UL (B)	0°	/	UL, VDE
	15EDGKNGB-3.81	Compact PCB plug with lock-and-release locking system	02-20	3.81	8 IEC 8 UL (B,D)	250 IEC 300 UL (B,D)	/	Push-in spring connection	UL
	15EDGRMG-3.81	PCB header	02-20	3.81	8 IEC 8 UL (B,D)	250 IEC 300 UL (B,D)	0°	/	UL
	2EDGKDBG-5.08	PCB plug with lock-and-release locking system	02-12	5.08	20 IEC 10 UL (B,D)	320 IEC 300 UL (B,D)	/	Push-in spring connection	/
	2EDGVMG-5.08	PCB header	02-12	5.08	20 IEC 15 UL (B) 10 UL (D)	320 IEC 300 UL (B,D)	90°	/	/
	15EDGKDBG-3.5	PCB plug with lock-and-release locking system	02-12	3.5	7 IEC 8 UL (B,C,D)	250 IEC 300 UL (B,C,D)	/	Push-in spring connection	/
	15EDGVMG-3.5	PCB header	02-12	3.5	7 IEC 8 UL (B,D)	250 IEC 300 UL (B,D)	90°	/	/